

ICS Performance Guarantee Bulletin 1.9 – Mimaki

Issued: October 2024

Introduction

The ICS Performance Guarantee combines our films with qualified OEM components to form a system which is guaranteed to be compatible and provide superior performance. You know exactly what to expect from your finished Avery Dennison graphics because your chosen combination has already withstood rigorous lab testing and met a very stringent set of durability and physical performance specifications. Please refer to [Avery Dennison ICS Performance Guarantee Terms and Conditions 1.0](#) for further details.

Printer Configuration

Avery Dennison ICS Performance Guarantee for digital inkjet printed graphics with the following Mimaki printers and inks:

Equipment Manufacturer



Printer name	Ink series	ICS Number
JV5 Series	HS / ES3	1.9.1
JV33 / 150 / 300 Series**	SS21 / ES3 / BS3 / BS4	1.9.1
CJV30 / 150 / 300 Series**	SS21 / ES3 / BS3 / BS4	1.9.1
JV34-260	SS21	1.9.1
JV100	SS21	1.9.1
JV400 LX	LX101	1.9.1
UJV160	LF-200	1.9.1
UJV500-160	LUS200	1.9.1
UCJV300 Series	LUS200	1.9.1
JV100	AS5	1.9.2
UCJV150 / 300 Series	LUS170	1.9.2
JFX200-2513	LUS150	1.9.3
JFX500-2131	LUS150	1.9.3
UJV500-160	LUS150	1.9.3
JV400 SUV	SU100	1.9.3

* Where relevant white, and orange inks are excluded from this warranty.

ICS Number 1.9.1

Premium	Graphic Protection - DOL	Warranty Period (years)						Application Substrate				
		Unprinted Zone 1		Zone 2		Zone 3		Flat	Simple Curves	Rivets	Compound Curves	Deep Recesses & Corrugations
		Indoor	Outdoor Vertical	Outdoor Horizontal	Outdoor Vertical	Outdoor Horizontal						
SP 1503 Easy Apply™ SP 1504 Easy Apply RS™	Unprotected	10	-	-	-	-	-	-	-	-	-	-
	DOL 6460	8	6	3	5	2	●	●	●	●	●	●
	DOL 1460Z DOL 1480Z	8	5	-	3	-	●	●	●	●	●	●
	DOL 1060Z	8	5	-	3	-	●	●	●	-	-	-
MPI 1105 Easy Apply RS™ MPI 1106 Hi Tack Easy Apply™	Unprotected	10	-	-	-	-	-	-	-	-	-	-
	DOL 6460	8	6	3	5	2	●	●	●	●	●	●
	DOL 1460Z DOL 1480Z	8	5	-	3	-	●	●	●	●	●	●
	DOL 1060Z	8	5	-	3	-	●	●	●	-	-	-
	SL 4530 Anti-Graffiti (DOL 4300)	8	4	-	2.5	-	●	-	-	-	-	-
SP 1540 Ultra Clear	Unprotected	10	-	-	-	-	-	-	-	-	-	-
	DOL 6460 SP 1540	8	6	3	5	2	●	●	●	●	●	●
	DOL 1460Z DOL 1480Z	8	5	-	3	-	●	●	●	●	●	●
	DOL 1060Z	8	5	-	3	-	●	●	●	-	-	-

* Not warranted for damage or fading of inks from abrasion or chemicals. See ICS Performance Guarantee terms and conditions for full details.

ICS Number 1.9.1

	Graphic Protection - DOL	Warranty Period (years)						Application Substrate				
		Zone 1		Zone 2		Zone 3		Flat	Simple Curves	Rivets	Compound Curves	Deep Recesses & Corrugations
		Unprinted	Indoor	Outdoor Vertical	Outdoor Horizontal	Outdoor Vertical	Outdoor Horizontal					
High Performance												
MPI 2000	Unprotected	7	-	-	-	-	-	-	-	-	-	-
MPI 2002												
MPI 2006 Hi Tack	DOL 1060Z		7	4.5	-	3	-	●	●	-	-	-
MPI 2105 Easy Apply RS™												
MPI 2120	DOL 2000		6	4	-	2.5	-	●	●	-	-	-
MPI 2126 Hi Tack Easy Apply™	DOL 2100											
MPI 2040	DOL 2200											
MPI 2041												
MPI 2050 Translucent	SL 4530 Anti-Graffiti (DOL 4300)		7	4	-	2.5	-	●	-	-	-	-
MPI 2611 Wall Film												
	Unprotected	4	5 [^]	-	-	-	-	●	-	-	-	-
	DOL 1460Z		7	-	-	-	-	●	-	-	-	-
	DOL 1480Z											
	DOL 1060Z		7	-	-	-	-	●	-	-	-	-
	DOL 2000		6	-	-	-	-	●	-	-	-	-
	DOL 2100											
	DOL 2200											
MPI 2636 Series Textured Hi Tack	Unprotected	4	5 [^]	-	-	-	-	●	-	-	-	-
Intermediate												
MPI 2900	Unprotected	5	-	-	-	-	-	-	-	-	-	-
MPI 2902												
MPI 2904 Easy Apply™	DOL 2000											
MPI 2906	DOL 2100		5	3.5	-	2	-	●	●	-	-	-
MPI 2920	DOL 2200											
MPI 2921 Easy Apply™												
MPI 2924 Easy Apply™	DOL 2980		4	3	-	1.5	-	●	●	-	-	-
MPI 2926	DOL 2960											
Promotional												
MPI 3000PP	Unprotected	3	-	-	-	-	-	-	-	-	-	-
MPI 3001PP												
MPI 3002PP												
MPI 3021	DOL 3000											
MPI 3026 Supertack	DOL 3100		3	2	-	1	-	●	-	-	-	-
MPI 3041PP	DOL 3200											
MPI 3300 Series												
	Unprotected	3	-	-	-	-	-	-	-	-	-	-
	DOL 3000											
	DOL 3100		3	1.5	-	0.8	-	●	-	-	-	-
	DOL 3200											

[^] Not warranted for damage or fading of inks from abrasion or chemicals. See ICS Performance Guarantee terms and conditions for full details.

ICS Number 1.9.1

Specialty	Graphic Protection - DOL	Warranty Period (years)						Application Substrate				
		Zone 1		Zone 2		Zone 3		Flat	Simple Curves	Rivets	Compound Curves	Deep Recesses & Corrugations
		Unprinted	Indoor	Outdoor Vertical	Outdoor Horizontal	Outdoor Vertical	Outdoor Horizontal					
MPI Dusted Glass Easy Apply RS™	Unprotected	5	9 [#]	-	-	-	-	●	-	-	-	-
	DOL 1060Z	-	-	4	-	2.5	-	●	-	-	-	-
	DOL 2000 DOL 2100 DOL 2200	-	-	3	-	1.5	-	●	-	-	-	-
SF 100-103-S Ultra Clear	Unprotected	5	4 [^]	-	-	-	-	●	-	-	-	-
SP 8526 Wall Film Textile	Unprotected	4	4 [^]	-	-	-	-	●	-	-	-	-
Reflective												
V-4000 Series	Unprotected	7	-	-	-	-	-	-	-	-	-	-
	DOL 6460	-	-	6	3	5	2	●	●	●	●*	-
	DOL 1460Z DOL 1480Z	-	-	5	-	3	-	●	●	●	●*	-
	DOL 1060Z	-	-	5	-	3	-	●	●	●	-	-
V-8000 Visiflex White	Unprotected	7	-	-	-	-	-	-	-	-	-	-
	DOL 6460	-	-	5	-	3	-	●	●	-	-	-
	DOL 1460Z DOL 1480Z	-	-	5	-	3	-	●	●	-	-	-
	DOL 1060Z	-	-	5	-	3	-	●	●	-	-	-
Perforated Window Films**												
MPI 2509 MPI 2709 PWF	Unprotected	3	-	-	-	-	-	-	-	-	-	-
	DOL 6460	-	-	2	-	1	-	●	●	-	-	-
	DOL 1060Z	-	-	1	-	6mo	-	●	●	-	-	-
Floor Graphic System												
MPI 3002PP MPI 3041PP MPI 3302 MPI 3302 Easy Apply™	DOL 3100	3mo	-	-	-	-	-	●	-	-	-	-
	DOL 6000 Floor Graphics	9mo	-	-	-	-	-	●	-	-	-	-

[^] Not warranted for damage or fading of inks from abrasion or chemicals. See ICS Performance Guarantee terms and conditions for full details.

* Due to the thickness of V-4000 Premium Reflective films, not all compound curves and 3D shapes may be suitable to apply to, the installer should determine the suitability of the product before attempting the installation.

[#] 5 years unprinted on the inside of external windows. 9 years unprinted on internal windows and partitions

** Perforated Films must be edge-sealed as per our Instructional Bulletin 1.5

ICS Number 1.9.2

Premium	Graphic Protection - DOL	Warranty Period (years)						Application Substrate				
		Unprinted Zone 1		Zone 2		Zone 3		Flat	Simple Curves	Rivets	Compound Curves	Deep Recesses & Corrugations
		Indoor	Outdoor Vertical	Outdoor Horizontal	Outdoor Vertical	Outdoor Horizontal						
SP 1503 Easy Apply™ SP 1504 Easy Apply RS™	Unprotected	10	-	-	-	-	-	-	-	-	-	-
	DOL 6460	8	6	3	5	2	●	●	●	-	-	-
	DOL 1460Z DOL 1480Z	8	5	-	3	-	●	●	●	-	-	-
	DOL 1060Z	8	5	-	3	-	●	●	●	-	-	-
MPI 1105 Easy Apply RS™ MPI 1106 Hi Tack Easy Apply™	Unprotected	10	-	-	-	-	-	-	-	-	-	-
	DOL 6460	8	6	3	5	2	●	●	●	-	-	-
	DOL 1460Z DOL 1480Z	8	5	-	3	-	●	●	●	-	-	-
	DOL 1060Z	8	5	-	3	-	●	●	●	-	-	-
	SL 4530 Anti-Graffiti (DOL 4300)	8	4	-	2.5	-	●	-	-	-	-	-
SP 1540 Ultra Clear	Unprotected	10	-	-	-	-	-	-	-	-	-	-
	DOL 6460 SP 1540	8	6	3	5	2	●	●	●	-	-	-
	DOL 1460Z DOL 1480Z	8	5	-	3	-	●	●	●	-	-	-
	DOL 1060Z	8	5	-	3	-	●	●	●	-	-	-

* Not warranted for damage or fading of inks from abrasion or chemicals. See ICS Performance Guarantee terms and conditions for full details.

ICS Number 1.9.2

	Graphic Protection - DOL	Warranty Period (years)						Application Substrate				
		Zone 1		Zone 2		Zone 3		Flat	Simple Curves	Rivets	Compound Curves	Deep Recesses & Corrugations
		Unprinted	Indoor	Outdoor Vertical	Outdoor Horizontal	Outdoor Vertical	Outdoor Horizontal					
High Performance												
MPI 2000	Unprotected	7	-	-	-	-	-	-	-	-	-	-
MPI 2002												
MPI 2006 Hi Tack	DOL 1060Z		7	4.5	-	3	-	●	●	-	-	-
MPI 2105 Easy Apply RS™												
MPI 2120	DOL 2000		6	4	-	2.5	-	●	●	-	-	-
MPI 2126 Hi Tack Easy Apply™	DOL 2100											
MPI 2040	DOL 2200											
MPI 2041												
MPI 2050 Translucent	SL 4530 Anti-Graffiti (DOL 4300)		7	4	-	2.5	-	●	-	-	-	-
MPI 2611 Wall Film												
	Unprotected	4	5 [^]	-	-	-	-	●	-	-	-	-
	DOL 1460Z		7	-	-	-	-	●	-	-	-	-
	DOL 1480Z											
	DOL 1060Z		7	-	-	-	-	●	-	-	-	-
	DOL 2000		6	-	-	-	-	●	-	-	-	-
	DOL 2100											
	DOL 2200											
MPI 2636 Series Textured Hi Tack	Unprotected	4	5 [^]	-	-	-	-	●	-	-	-	-
Intermediate												
MPI 2900	Unprotected	5	-	-	-	-	-	-	-	-	-	-
MPI 2902												
MPI 2904 Easy Apply™	DOL 2000											
MPI 2906	DOL 2100		5	3.5	-	2	-	●	●	-	-	-
MPI 2920	DOL 2200											
MPI 2921 Easy Apply™												
MPI 2924 Easy Apply™	DOL 2980		4	3	-	1.5	-	●	●	-	-	-
MPI 2926	DOL 2960											
Promotional												
MPI 3000PP	Unprotected	3	-	-	-	-	-	-	-	-	-	-
MPI 3001PP												
MPI 3002PP												
MPI 3021	DOL 3000											
MPI 3026 Supertack	DOL 3100		3	2	-	1	-	●	-	-	-	-
MPI 3041PP	DOL 3200											
MPI 3300 Series												
	Unprotected	3	-	-	-	-	-	-	-	-	-	-
	DOL 3000											
	DOL 3100		3	1.5	-	0.8	-	●	-	-	-	-
	DOL 3200											

[^] Not warranted for damage or fading of inks from abrasion or chemicals. See ICS Performance Guarantee terms and conditions for full details.

ICS Number 1.9.2

Specialty	Graphic Protection - DOL	Warranty Period (years)						Application Substrate				
		Unprinted Zone 1		Zone 2		Zone 3		Flat	Simple Curves	Rivets	Compound Curves	Deep Recesses & Corrugations
		Indoor	Outdoor Vertical	Outdoor Horizontal	Outdoor Vertical	Outdoor Horizontal						
MPI Dusted Glass Easy Apply RS™	Unprotected	5	9 [#]	-	-	-	-	●	-	-	-	-
	DOL 1060Z	-	-	4	-	2.5	-	●	-	-	-	-
	DOL 2000 DOL 2100 DOL 2200	-	-	3	-	1.5	-	●	-	-	-	-
SF 100-103-S Ultra Clear	Unprotected	5	4 [^]	-	-	-	-	●	-	-	-	-
SP 8526 Wall Film Textile	Unprotected	4	4 [^]	-	-	-	-	●	-	-	-	-
Reflective												
V-4000 Series	Unprotected	7	-	-	-	-	-	-	-	-	-	-
	DOL 6460	-	-	6	3	5	2	●	●	●	●*	-
	DOL 1460Z DOL 1480Z	-	-	5	-	3	-	●	●	●	●*	-
	DOL 1060Z	-	-	5	-	3	-	●	●	●	-	-
V-8000 Visiflex White	Unprotected	7	-	-	-	-	-	-	-	-	-	-
	DOL 6460	-	-	5	-	3	-	●	●	-	-	-
	DOL 1460Z DOL 1480Z	-	-	5	-	3	-	●	●	-	-	-
	DOL 1060Z	-	-	5	-	3	-	●	●	-	-	-
Perforated Window Films**												
MPI 2509 MPI 2709 PWF	Unprotected	3	-	-	-	-	-	-	-	-	-	-
	DOL 6460	-	-	2	-	1	-	●	●	-	-	-
	DOL 1060Z	-	-	1	-	6mo	-	●	●	-	-	-
Floor Graphic System												
MPI 3002PP MPI 3041PP MPI 3302 MPI 3302 Easy Apply™	DOL 3100	3mo	-	-	-	-	-	●	-	-	-	-
	DOL 6000 Floor Graphics	9mo	-	-	-	-	-	●	-	-	-	-

[^] Not warranted for damage or fading of inks from abrasion or chemicals. See ICS Performance Guarantee terms and conditions for full details.

* Due to the thickness of V-4000 Premium Reflective films, not all compound curves and 3D shapes may be suitable to apply to, the installer should determine the suitability of the product before attempting the installation.

[#] 5 years unprinted on the inside of external windows. 9 years unprinted on internal windows and partitions

** Perforated Films must be edge-sealed as per our Instructional Bulletin 1.5

ICS Number 1.9.3

Premium	Graphic Protection - DOL	Warranty Period (years)						Application Substrate				
		Zone 1		Zone 2		Zone 3		Flat	Simple Curves	Rivets	Compound Curves	Deep Recesses & Corrugations
		Unprinted	Indoor	Outdoor Vertical	Outdoor Horizontal	Outdoor Vertical	Outdoor Horizontal					
SP 1503 Easy Apply™ SP 1504 Easy Apply RS™	Unprotected	10	-	-	-	-	-	-	-	-	-	-
	DOL 6460		8	6	3	5	2	●	●	-	-	-
	DOL 1460Z DOL 1480Z		8	5	-	3	-	●	●	-	-	-
	DOL 1060Z		8	5	-	3	-	●	●	-	-	-
MPI 1105 Easy Apply RS™ MPI 1106 Hi Tack Easy Apply™	Unprotected	10	-	-	-	-	-	-	-	-	-	-
	DOL 6460		8	6	3	5	2	●	●	-	-	-
	DOL 1460Z DOL 1480Z		8	5	-	3	-	●	●	-	-	-
	DOL 1060Z		8	5	-	3	-	●	●	-	-	-
SP 1540 Ultra Clear	Unprotected	10	-	-	-	-	-	-	-	-	-	-
	DOL 6460 SP 1540		8	6	3	5	2	●	●	-	-	-
	DOL 1460Z DOL 1480Z		8	5	-	3	-	●	●	-	-	-
	DOL 1060Z		8	5	-	3	-	●	●	-	-	-

^ Not warranted for damage or fading of inks from abrasion or chemicals. See ICS Performance Guarantee terms and conditions for full details.

ICS Number 1.9.3

	Graphic Protection - DOL	Warranty Period (years)						Application Substrate				
		Unprinted Zone 1		Zone 2		Zone 3		Flat	Simple Curves	Rivets	Compound Curves	Deep Recesses & Corrugations
		Indoor	Outdoor Vertical	Outdoor Horizontal	Outdoor Vertical	Outdoor Horizontal						
High Performance												
MPI 2000	Unprotected	7	-	-	-	-	-	-	-	-	-	
MPI 2002												
MPI 2006 Hi Tack	DOL 1060Z	7	4.5	-	3	-	●	●	-	-	-	
MPI 2105 Easy Apply RS™												
MPI 2120												
MPI 2126 Hi Tack Easy Apply™	DOL 2000	6	4	-	2.5	-	●	●	-	-	-	
MPI 2040	DOL 2100											
MPI 2041	DOL 2200											
MPI 2050 Translucent												
MPI 2611 Wall Film	Unprotected	4	5 [^]	-	-	-	●	-	-	-	-	
	DOL 1460Z	7	-	-	-	-	●	-	-	-	-	
	DOL 1480Z											
	DOL 1060Z	7	-	-	-	-	●	-	-	-	-	
	DOL 2000	6	-	-	-	-	●	-	-	-	-	
	DOL 2100											
	DOL 2200											
MPI 2636 Series Textured Hi Tack	Unprotected	4	5 [^]	-	-	-	●	-	-	-	-	
Intermediate												
MPI 2900	Unprotected	5	-	-	-	-	-	-	-	-	-	
MPI 2902												
MPI 2904 Easy Apply™	DOL 2000	5	3.5	-	2	-	●	●	-	-	-	
MPI 2906	DOL 2100											
MPI 2920	DOL 2200											
MPI 2921 Easy Apply™												
MPI 2924 Easy Apply™	DOL 2980	4	3	-	1.5	-	●	●	-	-	-	
MPI 2926	DOL 2960											
Promotional												
MPI 3000PP	Unprotected	3	-	-	-	-	-	-	-	-	-	
MPI 3001PP												
MPI 3002PP												
MPI 3021	DOL 3000	3	2	-	1	-	●	-	-	-	-	
MPI 3026 Supertack	DOL 3100											
MPI 3041PP	DOL 3200											
MPI 3300 Series	Unprotected	3	-	-	-	-	-	-	-	-	-	
	DOL 3000	3	1.5	-	0.8	-	●	-	-	-	-	
	DOL 3100											
	DOL 3200											

[^] Not warranted for damage or fading of inks from abrasion or chemicals. See ICS Performance Guarantee terms and conditions for full details.

ICS Number 1.9.3

Specialty	Graphic Protection - DOL	Warranty Period (years)						Application Substrate				
		Unprinted Zone 1		Zone 2		Zone 3		Flat	Simple Curves	Rivets	Compound Curves	Deep Recesses & Corrugations
		Indoor	Outdoor Vertical	Outdoor Horizontal	Outdoor Vertical	Outdoor Horizontal						
MPI Dusted Glass Easy Apply RS™	Unprotected	5	9 [#]	-	-	-	-	●	-	-	-	-
	DOL 1060Z	-	4	-	2.5	-	-	●	-	-	-	-
	DOL 2000 DOL 2100 DOL 2200	-	3	-	1.5	-	-	●	-	-	-	-
SF 100-103-S Ultra Clear	Unprotected	5	4 [^]	-	-	-	-	●	-	-	-	-
SP 8526 Wall Film Textile	Unprotected	4	4 [^]	-	-	-	-	●	-	-	-	-
Reflective												
V-4000 Series	Unprotected	7	-	-	-	-	-	-	-	-	-	-
	DOL 6460	-	6	3	5	2	-	●	●	-	-	-
	DOL 1460Z DOL 1480Z	-	5	-	3	-	-	●	●	-	-	-
	DOL 1060Z	-	5	-	3	-	-	●	●	-	-	-
V-8000 Visiflex White	Unprotected	7	-	-	-	-	-	●	●	-	-	-
	DOL 6460	-	5	-	3	-	-	●	●	-	-	-
	DOL 1460Z DOL 1480Z	-	5	-	3	-	-	●	●	-	-	-
	DOL 1060Z	-	5	-	3	-	-	●	●	-	-	-
Perforated Window Films**												
MPI 2509 MPI 2709 PWF	Unprotected	3	-	-	-	-	-	-	-	-	-	-
	DOL 6460	-	2	-	1	-	-	●	●	-	-	-
	DOL 1060Z	-	1	-	6mo	-	-	●	●	-	-	-
Floor Graphic System												
MPI 3002PP MPI 3041PP MPI 3302 MPI 3302 Easy Apply™	DOL 3100	3mo	-	-	-	-	-	●	-	-	-	-
	DOL 6000 Floor Graphics	9mo	-	-	-	-	-	●	-	-	-	-

[^] Not warranted for damage or fading of inks from abrasion or chemicals. See ICS Performance Guarantee terms and conditions for full details.

^{*} Due to the thickness of V-4000 Premium Reflective films, not all compound curves and 3D shapes may be suitable to apply to, the installer should determine the suitability of the product before attempting the installation.

[#] 5 years unprinted on the inside of external windows. 9 years unprinted on internal windows and partitions

^{**} Perforated Films must be edge-sealed as per our Instructional Bulletin 1.5

Avery Dennison® ICS Performance Guarantee

Additional information on graphics durability

Expected Durability and Potential Durability Reductions

The expected durability of Avery Dennison films are defined as the expected performance life of the Avery Dennison graphic film(s) within the AP region in outdoor vertical exposure conditions. The actual performance life will depend on a variety of factors, including selection and preparation of substrate, angle and direction of exposure, application methods, environmental conditions and cleaning/maintenance of the films. In case of films used in areas of high temperatures or humidity, high altitudes and industrially polluted areas the performance will be further reduced.

Expected Durability and Warranted Period Definitions


Expected durability is the expected period of time defined in the product data sheet, the product should, but is not warranted to, perform satisfactorily when applied in vertical exposure conditions as defined in [Instructional Bulletin 1.30](#). The warranted period communicated in this ICS Performance Guarantee Bulletin, is the maximum period of time Avery Dennison will warrant the finished products performance in accordance with ICS Performance Guarantee Terms and Conditions 1.0, provided that the film is properly stored, converted and installed in accordance with Avery Dennison guidelines.

Other Potential Durability Reductions

High elevations: In mountain areas UV damage is increased over exposures at sea level. This is due to the air being thinner and therefore damage of UV radiation increases significantly. Congested urban or industrial areas: Due to increased smog, pollutants and particulates in the atmosphere, applications of this kind have reduced durability expectations. Horizontal applications trap pollutants on the surface of the material, increasing the impact of UV exposure and reducing durability.


Angle and Direction of Exposure

Vertical exposure




The face of the graphic is up to 10° from vertical.

Non-vertical exposure



The face of the graphic is between 10° to 45° from vertical. The durability as stated in this ICS performance guarantee document is reduced by 50% for non-vertical applications.

Horizontal exposure



The face of the graphic is between 45° and 90° from vertical. Horizontal applications are not warranted and do not have any expectations of durability, unless otherwise stated in this ICS performance guarantee.

Zone Chart - Asia Pacific (except Australia)

Zone 2

Bangladesh	East Timor	Korea (South)	Micronesia	Rwanda	Taiwan
Bhutan	Fiji	Laos	Myanmar (Burma)	Samoa	Thailand
Burkina Faso	Guinea	Lesotho	Nepal	Singapore	Togo
Burundi	India	Madagascar	New Zealand	South Africa (East)	Turkmenistan
Cambodia	Indonesia	Malaysia	Pakistan	Sri Lanka	Vietnam
Cameroon	Ivory Coast	Mauritania	Papua New Guinea	Suriname	
China	Japan	Mauritius	Philippines	Swaziland	

Zone 3

Angola	Congo	Gambia	Mozambique	Sierra Leone	Zambia
Botswana	Equatorial Guinea	Ghana	Namibia	Somalia	Zimbabwe
Central African Rep.	Eritrea	Kenya	Niger	Tanzania	
Chad	Ethiopia	Liberia	Nigeria	Tunisia	
	Gabon	Mali	Senegal	Uganda	

*All locations (mentioned in zones 1 and 2) when installed above altitudes of 1000 meters.

Zone Chart and Map - Australia

Zone 1


Tasmania

Zone 2

Adelaide
Albany
Brisbane*
Canberra
Coffs Harbour
Esperance
Melbourne
Perth*
Sydney

Zone 3

Alice Springs
Broken Hill
Broome
Cairns
Carnarvon
Ceduna
Cook
Darwin
Dubbo
Geraldton
Kalgoorlie
Mackay
Mount Isa
Newman
Port Augusta
Port Hedland
Telfer
Townsville

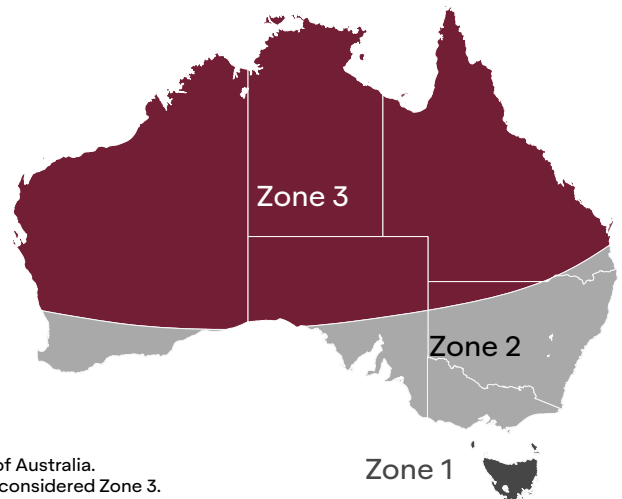

*All areas 100km North of Perth and Brisbane, indicated by line dissecting map illustration of Australia. All locations mentioned in zones 1 and 2 when installed above altitudes of 1000 meters are considered Zone 3.



#MakingPossible

© 2024 Avery Dennison Corporation. All rights reserved. The "Making Possible" tagline, Avery Dennison and all other Avery Dennison brands, product names and codes are trademarks of Avery Dennison Corporation. All other brands or product names are trademarks of their respective owners. Fortune 500® is a trademark of Time, Inc. Branding and other information on any samples depicted are fictitious. Any resemblance to actual names is purely coincidental.