

# Avery Dennison® NR Pro Series Automotive Window Films

## Excellent Solar Performance For Cool Comfort

Avery Dennison® NR Pro Series automotive window films utilizes nanotechnology with a fusion of nano particles, to ensure high performance, durability and long-lasting color. A cool and comfortable ride is what every driver experiences with NR Pro Series automotive window films.

### Features and Benefits

- Color stable film won't fade to purple.
- Premium heat rejection and up to 94% glare reduction, with minimal reflective effect.
- Blocks 99% of harmful UV for ultimate driver comfort.
- High clarity adhesive delivers no smears or smudging during installation.
- Scratch-resistant coating keeps film looking new.



Series	NR Pro Non-Reflective
Technology	Nanotechnology UV Stable Dye Metal-Free
Color Tone	Graphite
Construction	2-Ply Weatherable
Thickness	1.5 Mil
Warranty	Lifetime, Limited Non-Transferable <sup>1</sup>
Color Stable	Yes


<sup>1</sup> For information on warranty terms, exclusions and certain limitations that apply please see the applicable product data sheets and other literature and bulletins on our website: [graphics.averydennison.com](http://graphics.averydennison.com)

### Optical & Solar Properties<sup>2</sup>

Film		Ultra-violet Block	Visible Light		Glare Reduction	SIRR <sup>3</sup>	IRER <sup>4</sup>	Shading Coefficient	Total Solar Energy			
			Transmitted	Reflected (Exterior)					Reflected	Transmitted	Absorbed	Rejected
NR Pro 05	R058P0A	>99%	6%	7%	94%	60%	43%	0.50	7%	25%	68%	57%
NR Pro 15	R058P9A	>99%	16%	7%	82%	49%	37%	0.59	6%	34%	60%	49%
NR Pro 20	R058P6A	>99%	22%	7%	76%	50%	37%	0.60	7%	37%	56%	48%
NR Pro 30	R058P8A	>99%	32%	7%	65%	45%	34%	0.66	7%	44%	49%	43%
NR Pro 35	R058P5A	>99%	37%	8%	58%	46%	34%	0.68	7%	45%	48%	41%
NR Pro 40	R058P4A	>99%	42%	8%	51%	43%	32%	0.71	8%	49%	43%	39%
NR Pro 50	R058P7A	>99%	52%	8%	39%	39%	29%	0.74	8%	55%	37%	36%

### Deep Graphite Appearance<sup>5</sup>

The cool, non-fading graphite tone of NR Pro automotive window films are offered in seven VLT levels.

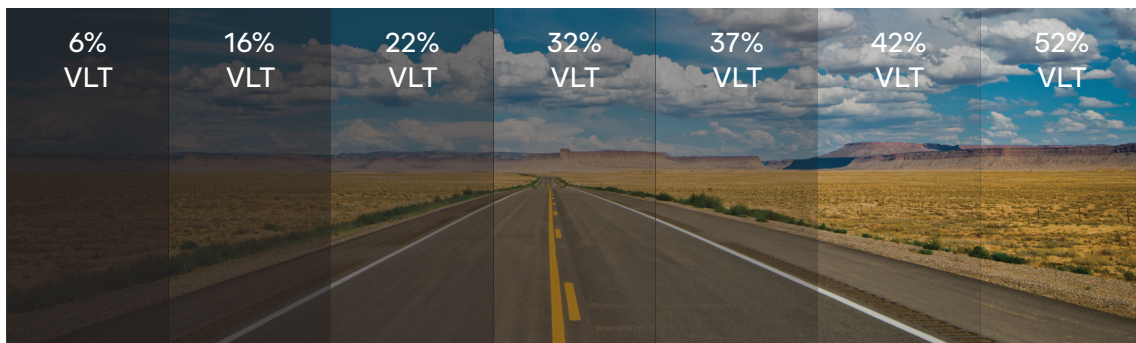

This image has been simulated and is not actual product comparison.

### Ease Of Installation

NR Pro Series automotive window films have excellent professional installer features including optimal heat-shrink capabilities that tack fast, for a durable and secure fit as well as easy clean removal for effortless adjustments.

For information please contact: [windowfilm.orders@averydennison.com](mailto>windowfilm.orders@averydennison.com) or 1-800-660-5559

<sup>2</sup>Performance results are calculated on 1/4" (6mm) clear glass using NFRC methodology and LBNL Window 5.2 software, and are subject to variations in process conditions within industry standards.

<sup>3</sup>SIRR - Selective InfraRed Rejection: the percentage of IR radiation that is not directly transmitted through a glazing system. Calculated as %SIRR = 100% - % Transmission (@ 780-2500nm).

<sup>4</sup>IRER - InfraRed Energy Rejection: the percentage of Near Infrared Energy Rejection as measured between 780-2500nm. Calculated as the TSER over 780-2500nm: %IRER = 100% - 100\*SHGC (@ 780-2500nm).

<sup>5</sup>Colors and tinting level are an approximate match. For a true color reference, please refer to the actual film sample.

All statements, technical information and recommendations about Avery Dennison products are based upon tests and information believed to be reliable but do not constitute a guarantee or warranty of any kind. All Avery Dennison products are sold with the understanding that Purchaser has independently determined the suitability of such products for its intended and other purposes.

